Franke Diskette 3000 Tap
Replacing Cartridge and O-Rings

Replacing the cartridge

Before replacing the valves, you will need to turn the water off. You will need to remove the handle indicator (1) and then unscrew the handle retaining screw (2). This will then allow you to remove the handle (3). You can then use an adjustable spanner to unscrew the existing valve (4) and fit the replacement.

Replacing the o rings

To replace the o rings, you will need to remove the spout retaining screw (5) by using a 3mm allen key. You will then be able to remove the spout (6) and replace the o rings (7) with the replacements.

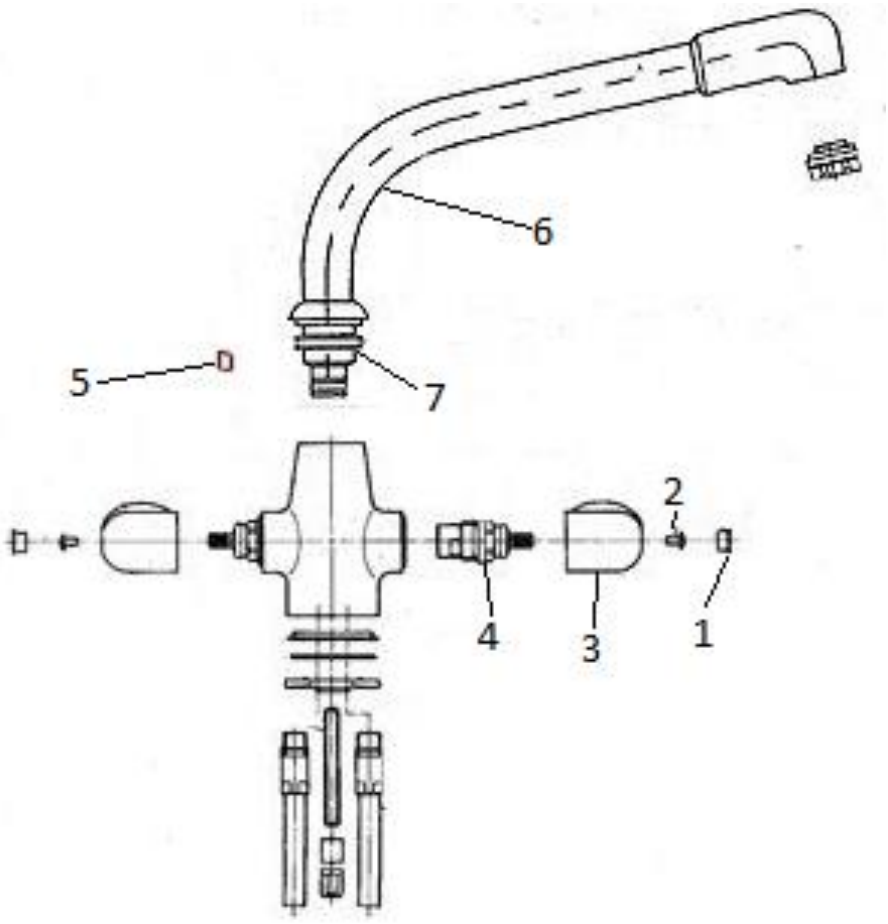

Central Services Ltd
Unit 17 Park Hall Business Village
Park Hall Road
Stoke-on-Trent
ST3 5XA

01782 599258
ks-ukcentralservices.gb@franke.com

Make it Wonderful

FRANKE