Carron Phoenix Elix Tap
Replacing Cartridges & O-Rings

Replacing the Cartridge

Before replacing the cartridge, you will need to turn the water off. You'll first need to remove the handle indicator (1) by prising it off. You can then remove the handle retaining screw (2) by using a 2.5mm allen key. You will then be able to remove the handle (3) and unscrew the cartridge cover (4) by unscrewing it anticlockwise. You can then use an adjustable spanner to remove the cartridge locking ring (5). You can then replace the cartridge (6) with the replacement parts.

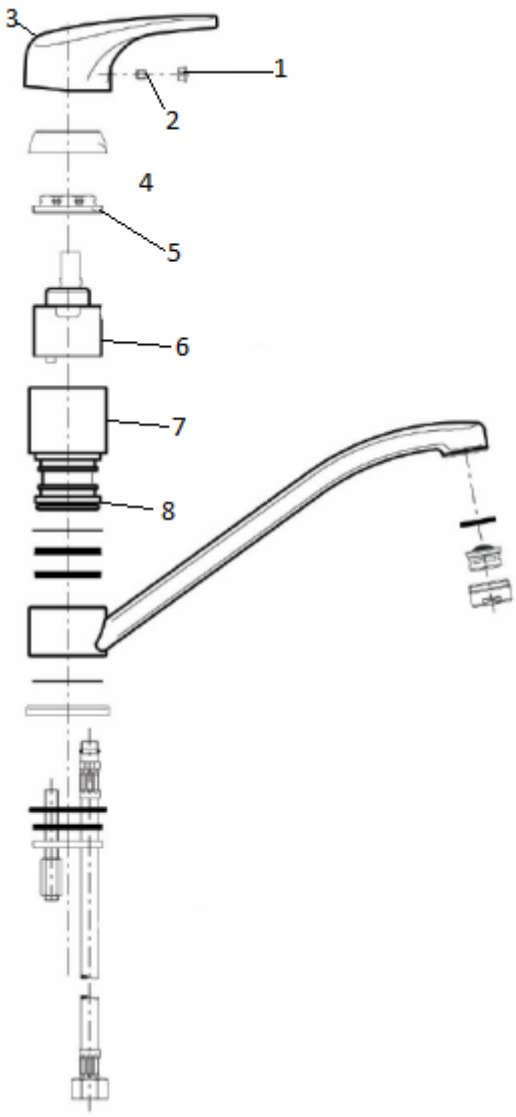

Replacing the O-Rings

You will first need to follow the above instructions first. Once you've removed the cartridge (6), you can then unscrew the cartridge surround (7). You can then replace the o rings (8) at the base of this part.

Central Services Ltd
Unit 17 Park Hall Business Village
Park Hall Road
Stoke-on-Trent
ST3 5XA

01782 599258
ks-ukcentralservices.gb@franke.com

CARRON PHOENIX