Carron Phoenix Nautilux Tap
Replacing Cartridges & O-Rings

Replacing the Cartridge

Before replacing the cartridge, you will need to turn the water off. You'll first need to remove the handle retaining screw (1) at the back of the handle by using a 2.5mm allen key. You can then remove the handle (2). You can then remove the cartridge locking ring (3) by using an adjustable spanner. You will then be able to remove the cartridge (4) and replace with the new parts.

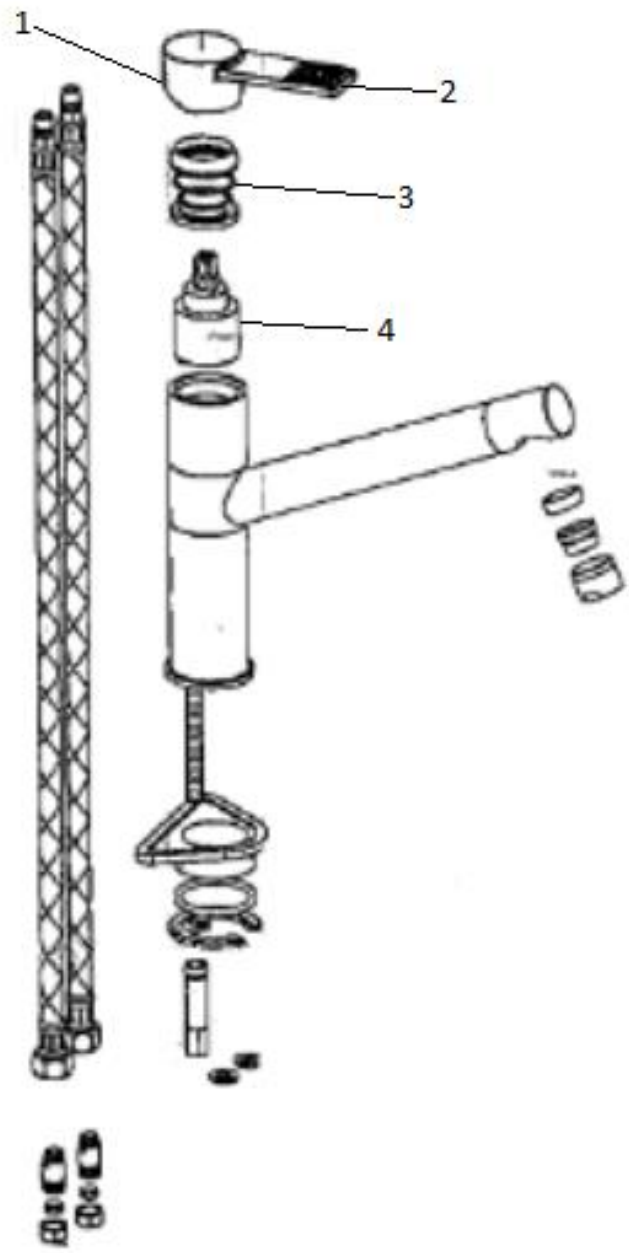

Central Services Ltd
Unit 17 Park Hall Business Village
Park Hall Road
Stoke-on-Trent
ST3 5XA

01782 599258
ks-ukcentralservices.gb@franke.com

CARRON PHOENIX