
Carron Phoenix Victoria Tap Replacing Cartridges & O-Rings

Replacing the Cartridge

Before replacing the cartridge, you will need to turn the water off. You will need to remove the handle indicator (1) by unscrewing it anticlockwise. Once this is removed, you'll be able to remove the handle retaining srew (2) with a crosshead screwdriver. This will then allow you to remove the handle (3). You can the nunscrew the valve cover (4) by unscrewing it anticlockwise. You'll then be able to unscrew the valve (5) by using an adjustable spanner. You can then fit the replacement parts.

Replacing the O Rings

To replace the o rings, you will first need to unscrew the spout collar (6) by unscrewing it anticlockwise. You can then lift the spout (7) up and replace the o rings (8) at the base with the replacement parts.

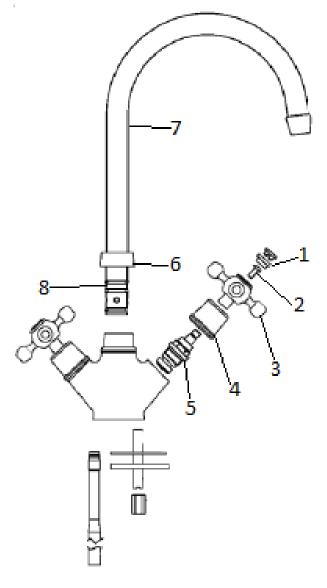

Central Services Ltd Unit 17 Park Hall Business Village Park Hall Road Stoke-on-Trent ST3 5XA 01782 599258 ks-ukcentralservices.gb@franke.com

